

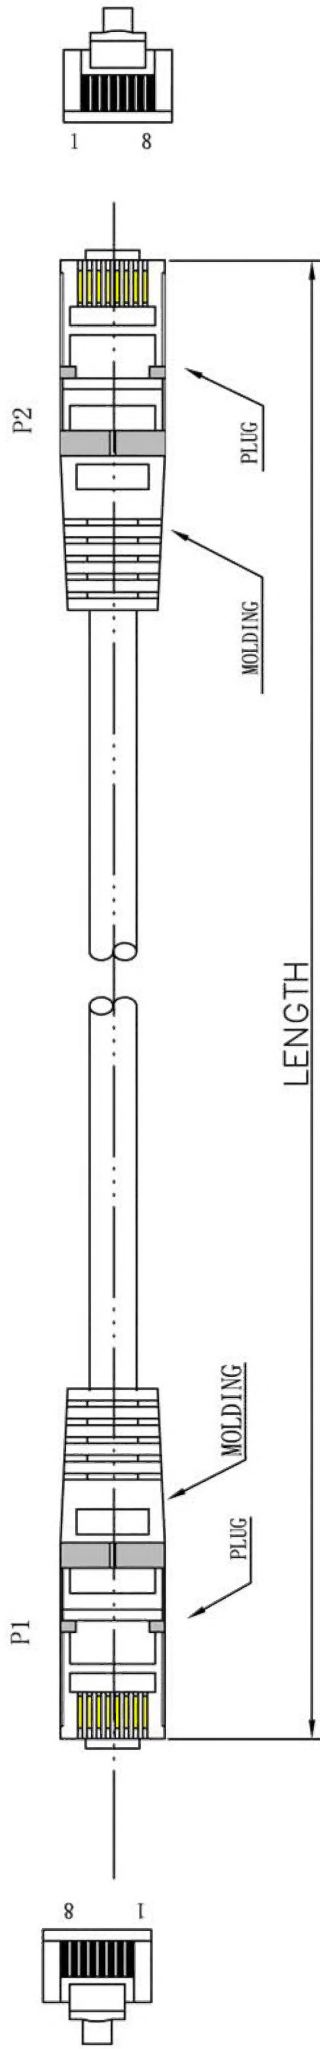


DATE	REV	DESCRIPTION	BY	CHKD
10/27	A/O	NEW		



Marking:<LP009> FTP CAT.5E PATCH ISO/IEC 11801 & EN 50288 3P VERIFIED FOR GIGABIT ETHERNET 26AWGX4P TYPE CM (UL) CMH E164469-F3

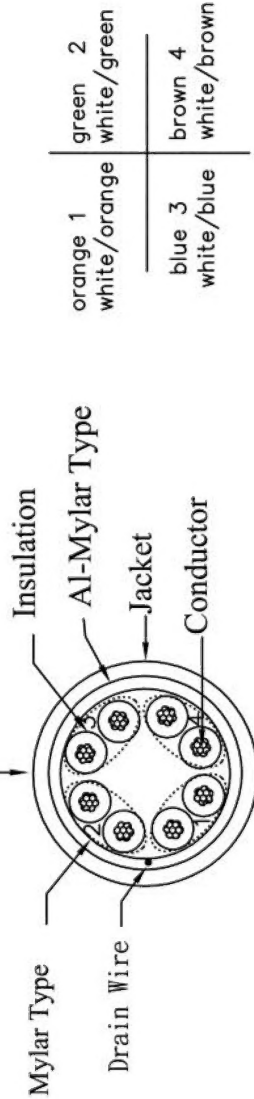


orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

Conductor	Bare Copper 26AWG 7/0.152±0.005mm
Insulation	Thickness MIN at any point 0.15mm MAX AVG 0.25mm Diameter 0.86±0.06mm
Jacketing PVC	Thickness MIN at any point 0.50mm MAX AVG 0.60mm Diameter 5.6±0.2mm

WIRE	CAT.5E FTP STR 26AWG
PLUG	YS-01
Length	1.0M
WIRE COLOR	

ROHS Compliant

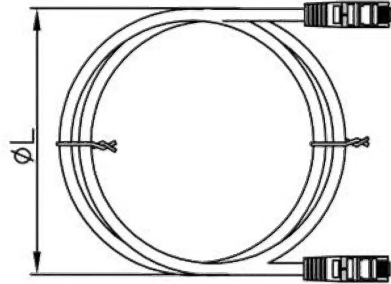

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.X	± 0.2
.XX	± 0.05



PINOUT			
PA/R	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

DRAW.NO	00105	ITEM	
DEPARTMENT	R&D	DRAW	2008/10/27
SCALE		CHECKER	APPROVAL
UNIT	MM	SHEET	1 OF 1